

I-20

Radius: **4.9 to 14.0 m**
Flow: **0.07 to 3.23 m³/hr; 1.2 to 53.8 l/min**

The I-20 is loaded with upgraded features such as FloStop Control, check valves, and efficient nozzles that make it the perfect choice in a range of applications.

KEY BENEFITS

- Patented automatic arc return feature returns the turret back to the original arc pattern if vandalised; adjustable arc from 50° to 360°
- Non-strippable drive mechanism is protected from damage if turned in the opposite direction of travel
- Part and full-circle in one model is flexible for all landscapes and decreases inventory
- Headed and slotted setscrew allows radius adjustment with a Hunter Wrench or flat-blade screwdriver
- FloStop™ closes the flow of water from individual sprinklers to change the nozzle or perform repairs
- Flat-top nozzles allow fast, easy insertion
- Drain Check Valve prevents low-head drainage (up to 3 m of elevation)

OPERATING SPECIFICATIONS

- Nozzle choices: 34
- Radius: 4.9 to 14.0 m
- Flow: 0.07 to 3.23 m³/hr; 1.2 to 53.8 l/min
- Recommended pressure range: 1.7 to 4.5 bar; 170 to 450 kPa
- Operating pressure range: 1.4 to 7.0 bar; 140 to 700 kPa
- Precipitation rate: 10 mm/hr approximately
- Nozzle trajectory: standard = 25°, low-angle = 13°
- Nozzle racks: 1.5 to 8.0 blue, 2.0 to 4.5 low-angle grey, 0.50 to 3.0 black, 6.0 to 13.0 green, MPR-25, MPR-30, MPR-35
- Warranty period: 5 years

FACTORY-INSTALLED OPTIONS

- No Drain Check Valve (NCV models)
- Reclaimed water ID
- Blue #1.5–4.0 Nozzles



I-20 Reclaimed

Available as a factory-installed option on all models

USER-INSTALLED OPTIONS

- HSJ-0 prefabricated ¾" PVC Swing Joint

I-20 (PLASTIC) – SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 Nozzle Options
I-20-00 = Shrub I-20-04 = 10 cm pop-up I-20-06 = 15 cm pop-up I-20-12 = 30 cm pop-up	Adjustable arc, plastic, check valve, 8 standard nozzles, and 4 low-angle nozzles	(blank) = No option NCV = Without check valve (only available on 10 cm model) R = Reclaimed water ID	Blue 1.5–8.0 Grey low-angle Black short-radius Green high-flow MPR-25-Q, T, H, F MPR-30-Q, T, H, F MPR-35-Q, T, H, F 1.5 to 4.0 = Only nozzles 1.5–4.0 can be factory-installed

I-20 (STAINLESS STEEL) – SPECIFICATION BUILDER: ORDER 1 + 2 + 3 + 4

1 Model	2 Standard Features	3 Feature Options	4 Nozzle Options
I-20-04-SS = 10 cm pop-up I-20-06-SS = 15 cm pop-up	Adjustable arc, stainless steel, check valve, 8 standard nozzles, and 4 low-angle nozzles	(blank) = No option NCV = Without check valve (only available on 10 cm model) R = Reclaimed water ID	Blue 1.5–8.0 Grey low-angle Black short-radius Green high-flow MPR-25-Q, T, H, F MPR-30-Q, T, H, F MPR-35-Q, T, H, F 1.5 to 4.0 = Only nozzles 1.5–4.0 can be factory-installed

Examples:

- I-20-04 = 10 cm pop-up, adjustable arc
- I-20-12-R-4.0 = 30 cm pop-up, adjustable arc, check valve, with reclaimed water ID, and 4.0 nozzle
- I-20-06-SS-R-3.0 = 15 cm pop-up, adjustable arc, stainless steel riser, with reclaimed water ID, and 3.0 nozzle



I-20-00

Overall height: 20 cm
Exposed diameter: 4.5 cm
Inlet size: ¾"



I-20-04

Overall height: 19 cm
Pop-up height: 10 cm
Exposed diameter: 4.5 cm
Inlet size: ¾"



I-20-06

Overall height: 25 cm
Pop-up height: 15 cm
Exposed diameter: 4.5 cm
Inlet size: ¾"



I-20-12

Overall height: 43 cm
Pop-up height: 30 cm
Exposed diameter: 4.5 cm
Inlet size: ¾"

**PGP ULTRA / I-20 / PRB BLUE STANDARD NOZZLE
PERFORMANCE DATA**

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	bar	kPa		m ³ /hr	l/min	■	▲
1.5 ● Blue	1.7	170	8.8	0.27	4.5	7	8
	2.0	200	9.1	0.29	4.8	7	8
	2.5	250	9.4	0.32	5.4	7	8
	3.0	300	9.8	0.35	5.9	7	9
	3.5	350	9.8	0.38	6.4	8	9
	4.0	400	9.8	0.41	6.8	9	10
2.0 ● Blue	4.5	450	9.4	0.43	7.2	10	11
	1.7	170	10.1	0.32	5.4	6	7
	2.0	200	10.1	0.35	5.8	7	8
	2.5	250	10.1	0.39	6.5	8	9
	3.0	300	10.4	0.43	7.2	8	9
	3.5	350	10.4	0.47	7.8	9	10
2.5 ● Blue	4.0	400	10.4	0.50	8.3	9	11
	4.5	450	10.4	0.53	8.8	10	11
	1.7	170	10.1	0.39	6.6	8	9
	2.0	200	10.4	0.43	7.1	8	9
	2.5	250	10.7	0.48	8.0	8	10
	3.0	300	10.7	0.54	8.9	9	11
3.0 ● Blue	3.5	350	10.7	0.58	9.7	10	12
	4.0	400	10.7	0.62	10.4	11	13
	4.5	450	10.7	0.66	11.1	12	13
	1.7	170	10.7	0.50	8.4	9	10
	2.0	200	10.7	0.54	9.1	10	11
	2.5	250	11.0	0.61	10.2	10	12
4.0 ● Blue	3.0	300	11.6	0.68	11.4	10	12
	3.5	350	11.9	0.74	12.3	10	12
	4.0	400	11.9	0.79	13.2	11	13
	4.5	450	11.9	0.84	14.0	12	14
	1.7	170	11.3	0.68	11.3	11	12
	2.0	200	11.6	0.73	12.2	11	13
5.0 ● Blue	2.5	250	11.9	0.81	13.6	12	13
	3.0	300	12.2	0.90	15.0	12	14
	3.5	350	12.2	0.97	16.2	13	15
	4.0	400	12.5	1.04	17.3	13	15
	4.5	450	12.5	1.10	18.3	14	16
	1.7	170	11.3	0.84	14.0	13	15
6.0 ● Blue	2.0	200	11.6	0.91	15.2	14	16
	2.5	250	11.9	1.02	17.1	15	17
	3.0	300	12.8	1.14	19.0	14	16
	3.5	350	12.8	1.24	20.6	15	17
	4.0	400	12.8	1.32	22.1	16	19
	4.5	450	12.8	1.41	23.4	17	20
8.0 ● Blue	1.7	170	11.6	1.01	16.8	15	17
	2.0	200	11.9	1.09	18.2	15	18
	2.5	250	12.2	1.22	20.4	16	19
	3.0	300	13.1	1.36	22.7	16	18
	3.5	350	13.1	1.47	24.5	17	20
	4.0	400	13.4	1.57	26.2	18	20
8.0 ● Blue	4.5	450	13.4	1.67	27.9	19	21
	1.7	170	11.3	1.35	22.5	21	25
	2.0	200	11.9	1.46	24.3	21	24
	2.5	250	12.5	1.63	27.2	21	24
8.0 ● Blue	3.0	300	13.4	1.81	30.2	20	23
	3.5	350	13.7	1.95	32.6	21	24
	4.0	400	14.0	2.09	34.8	21	25
	4.5	450	14.0	2.22	36.9	23	26

Note:

All precipitation rates are calculated for 180° operation. For the precipitation rate of a 360° sprinkler, divide by 2.

**PGP ULTRA / I-20 / PRB GREY LOW-ANGLE
NOZZLE PERFORMANCE DATA**

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	bar	kPa		m ³ /hr	l/min	■	▲
2.0 ● LA Grey	1.7	170	7.3	0.33	5.6	12	14
	2.0	200	7.6	0.36	6.0	12	14
	2.5	250	7.9	0.40	6.7	13	15
	3.0	300	8.2	0.45	7.4	13	15
	3.5	350	8.5	0.48	8.0	13	15
	4.0	400	8.8	0.52	8.6	13	15
2.5 ● LA Grey	4.5	450	9.1	0.55	9.1	13	15
	1.7	170	7.9	0.44	7.3	14	16
	2.0	200	8.2	0.47	7.9	14	16
	2.5	250	8.8	0.53	8.8	14	16
	3.0	300	9.4	0.59	9.8	13	15
	3.5	350	10.1	0.64	10.6	13	15
3.5 ● LA Grey	4.0	400	10.4	0.68	11.3	13	15
	4.5	450	10.7	0.72	12.0	13	15
	1.7	170	8.5	0.58	9.7	16	18
	2.0	200	8.8	0.62	10.3	16	18
	2.5	250	9.1	0.68	11.4	16	19
	3.0	300	10.1	0.75	12.5	15	17
4.5 ● LA Grey	3.5	350	10.7	0.80	13.3	14	16
	4.0	400	11.0	0.85	14.1	14	16
	4.5	450	11.3	0.89	14.8	14	16
	1.7	170	8.2	0.71	11.8	21	24
	2.0	200	8.8	0.76	12.7	19	23
	2.5	250	9.1	0.84	14.1	20	23
4.5 ● LA Grey	3.0	300	10.1	0.93	15.5	18	21
	3.5	350	10.7	1.00	16.6	18	20
	4.0	400	11.0	1.06	17.6	18	20
	4.5	450	11.3	1.12	18.6	18	20

**PGP ULTRA / I-20 /
PRB NOZZLES**


Blue Standard /
Grey Low-Angle
(P/N 782900)

Flat-top nozzle for easy insertion coupled with a headed slotted adjustment screw for quick radius adjustment with a Hunter Wrench or a flat-blade screwdriver.

**Pressure Regulation**

Continual operating pressure of 3.1 bar; 310 kPa

I-20 04 with PRB Body**PR-075**

Overall height: 5.7 cm
Inlet/outlet size: 3/4"
For use with all 3/4" inlet sprinklers models, regulates to 3.1 bar; 310 kPa


PGP ULTRA / I-20 GREEN HIGH-FLOW NOZZLE PERFORMANCE DATA

Nozzle		Pressure		Radius	Flow		Precip mm/hr	
		bar	kPa		m ³ /hr	l/min	■	▲
10	Dk. Green	1.7	170	10.7	1.48	24.6	26	30
		2.0	200	11.9	1.60	26.7	23	26
		2.5	250	12.5	1.80	30.0	23	27
		3.0	300	12.8	2.01	33.5	25	28
		3.5	350	13.1	2.18	36.3	25	29
		4.0	400	13.7	2.34	39.0	25	29
13	Dk. Green	1.7	170	11.0	1.91	31.9	32	37
		2.0	200	12.2	2.08	34.6	28	32
		2.5	250	12.8	2.34	38.9	29	33
		3.0	300	13.1	2.61	43.4	30	35
		3.5	350	13.4	2.83	47.1	31	36
		4.0	400	13.7	3.03	50.5	32	37
6.0 LA	Dk. Green	1.7	170	9.1	0.86	14.3	21	24
		2.0	200	9.4	0.94	15.6	21	24
		2.5	250	10.1	1.07	17.8	21	24
		3.0	300	10.7	1.20	20.0	21	24
		3.5	350	11.3	1.31	21.9	21	24
		4.0	400	11.6	1.42	23.6	21	24
8.0 LA	Dk. Green	1.7	170	10.1	1.17	19.5	23	27
		2.0	200	10.7	1.28	21.3	22	26
		2.5	250	11.3	1.44	24.0	23	26
		3.0	300	11.6	1.61	26.9	24	28
		3.5	350	11.9	1.76	29.3	25	29
		4.0	400	12.5	1.89	31.5	24	28
		4.5	450	12.5	2.01	33.6	26	30

I-20 with Blue Standard Nozzle



Convenient Nozzle Rack

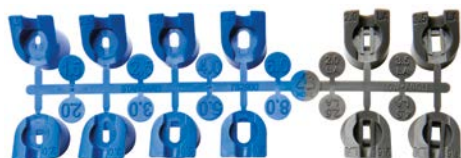

PGP ULTRA / I-20 / PRB BLACK SHORT-RADIUS NOZZLE PERFORMANCE DATA

Nozzle		Pressure		Radius	Flow		Precip mm/hr	
		bar	kPa		m ³ /hr	l/min	■	▲
.50 SR	Black	1.7	170	4.9	0.07	1.2	6	7
		2.0	200	5.2	0.08	1.3	6	7
		2.5	250	5.2	0.09	1.5	7	8
		3.0	300	5.2	0.10	1.7	8	9
		3.5	350	5.5	0.12	1.9	8	9
		4.0	400	5.5	0.13	2.1	8	10
1.0 SR	Black	1.7	170	4.9	0.16	2.7	14	16
		2.0	200	5.2	0.17	2.9	13	15
		2.5	250	5.2	0.19	3.2	14	17
		3.0	300	5.2	0.21	3.6	16	18
		3.5	350	5.5	0.23	3.8	15	19
		4.0	400	5.5	0.25	4.1	16	19
2.0 SR	Black	1.7	170	4.9	0.28	4.7	24	27
		2.0	200	5.2	0.31	5.2	23	27
		2.5	250	5.2	0.36	6.0	27	31
		3.0	300	5.2	0.41	6.9	31	35
		3.5	350	5.5	0.45	7.6	30	35
		4.0	400	5.5	0.49	8.2	33	38
.75 SR	Black	1.7	170	6.7	0.12	2.0	5	6
		2.0	200	7.0	0.13	2.2	5	6
		2.5	250	7.0	0.15	2.4	6	7
		3.0	300	7.3	0.16	2.7	6	7
		3.5	350	7.6	0.17	2.9	6	7
		4.0	400	7.6	0.19	3.1	6	7
1.5 SR	Black	1.7	170	6.7	0.23	3.8	10	12
		2.0	200	7.0	0.25	4.1	10	12
		2.5	250	7.0	0.28	4.6	11	13
		3.0	300	7.3	0.31	5.2	12	13
		3.5	350	7.6	0.34	5.6	12	13
		4.0	400	7.6	0.36	6.0	12	14
3.0 SR	Black	1.7	170	6.7	0.53	8.9	24	27
		2.0	200	7.0	0.56	9.3	23	26
		2.5	250	7.0	0.60	10.0	24	28
		3.0	300	7.3	0.64	10.7	24	28
		3.5	350	7.6	0.67	11.2	23	27
		4.0	400	7.6	0.70	11.7	24	28
		4.5	450	7.6	0.73	12.1	25	29


Note:

All precipitation rates are calculated for 180° operation. For the precipitation rate of a 360° sprinkler, divide by 2.

PGP ULTRA / I-20 / PRB NOZZLES



Dk. Green
High-Flow
(P/N 444800)



Black Short-Radius
(P/N 466100)



**PGP ULTRA / I-20 / PRB MPR-25 NOZZLE
PERFORMANCE DATA**

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	bar	kPa		m ³ /hr	l/min	■	▲
90° 	1.7	170	7.0	0.17	3.0	13.7	15.8
	2.4	240	7.3	0.20	3.6	14.9	17.3
	3.1	310	7.6	0.23	3.6	15.6	18.1
	3.8	380	7.6	0.25	4.2	17.4	20.1
	4.5	450	7.6	0.27	4.8	18.9	21.9
120° 	1.7	170	7.0	0.23	3.6	13.9	16.0
	2.4	240	7.3	0.27	4.8	15.4	17.8
	3.1	310	7.6	0.31	5.4	16.2	18.7
	3.8	380	7.6	0.35	6.0	18.0	20.7
	4.5	450	7.6	0.38	6.6	19.6	22.6
180° 	1.7	170	7.0	0.33	5.4	13.3	15.4
	2.4	240	7.3	0.39	6.6	14.7	17.0
	3.1	310	7.6	0.45	7.2	15.5	17.9
	3.8	380	7.6	0.50	8.4	17.3	20.0
	4.5	450	7.6	0.55	9.0	18.9	21.8
360° 	1.7	170	7.0	0.63	10.8	12.8	14.8
	2.4	240	7.3	0.76	12.6	14.2	16.4
	3.1	310	7.6	0.87	14.4	14.9	17.3
	3.8	380	7.6	0.97	16.2	16.6	19.2
	4.5	450	7.6	1.05	17.4	18.1	20.9

**MPR-25
NOZZLE****PGP ULTRA / I-20 / PRB MPR-35 NOZZLE
PERFORMANCE DATA**

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	bar	kPa		m ³ /hr	l/min	■	▲
90° 	1.7	170	9.8	0.32	5.4	13.4	15.4
	2.4	240	10.4	0.38	6.6	14.1	16.3
	3.1	310	10.7	0.44	7.2	15.3	17.7
	3.8	380	10.7	0.48	7.8	17.0	19.6
	4.5	450	10.7	0.52	9.0	18.4	21.3
120° 	1.7	170	9.8	0.40	6.6	12.7	14.6
	2.4	240	10.4	0.49	8.4	13.6	15.8
	3.1	310	10.7	0.56	9.6	14.7	17.0
	3.8	380	10.7	0.62	10.2	16.4	18.9
	4.5	450	10.7	0.68	11.4	17.9	20.7
180° 	1.7	170	9.8	0.62	10.2	13.1	15.2
	2.4	240	10.4	0.76	12.6	14.1	16.3
	3.1	310	10.7	0.87	14.4	15.2	17.6
	3.8	380	10.7	0.96	16.2	16.9	19.5
	4.5	450	10.7	1.05	17.4	18.4	21.3
360° 	1.7	170	9.8	1.22	20.4	12.8	14.8
	2.4	240	10.4	1.50	25.2	14.0	16.2
	3.1	310	10.7	1.72	28.8	15.1	17.5
	3.8	380	10.7	1.91	31.8	16.8	19.4
	4.5	450	10.7	2.09	34.8	18.3	21.2

**PGP ULTRA / I-20 / PRB MPR-30 NOZZLE
PERFORMANCE DATA**

Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	bar	kPa		m ³ /hr	l/min	■	▲
90° 	1.7	170	8.8	0.23	3.6	12.0	13.8
	2.4	240	9.1	0.28	4.8	13.4	15.4
	3.1	310	9.1	0.32	5.4	15.2	17.6
	3.8	380	9.1	0.35	6.0	17.0	19.6
	4.5	450	9.1	0.38	6.6	18.4	21.2
120° 	1.7	170	8.8	0.30	4.8	11.7	13.5
	2.4	240	9.1	0.37	6.0	13.2	15.2
	3.1	310	9.1	0.42	7.2	15.1	17.4
	3.8	380	9.1	0.47	7.8	16.8	19.4
	4.5	450	9.1	0.51	8.4	18.3	21.1
180° 	1.7	170	8.8	0.49	8.4	12.5	14.4
	2.4	240	9.1	0.59	9.6	14.1	16.2
	3.1	310	9.1	0.67	11.4	16.1	18.6
	3.8	380	9.1	0.75	12.6	17.9	20.7
	4.5	450	9.1	0.82	13.8	19.6	22.6
360° 	1.7	170	8.8	0.96	16.2	12.3	14.2
	2.4	240	9.1	1.15	19.2	13.8	15.9
	3.1	310	9.1	1.31	21.6	15.7	18.1
	3.8	380	9.1	1.45	24.0	17.4	20.0
	4.5	450	9.1	1.57	26.4	18.8	21.7

**MPR-30
NOZZLE**

PGP-04 Ultra with MPR-30 Nozzle

