

You can rest easy when you install a Philmac Ball Valve

You can rest easy when you install a Philmac Ball Valve

No flow restriction

Australian made

Every valve is bi-directionally pressure tested

Install in any direction

Potable water approved

Frost resistant

Strong and lightweight

UV stabilised materials

20 year warranty



Philmac Pty Ltd

ABN: 17 007 873 047

47-59 Deeds Road
North Plympton, South Australia
AUSTRALIA 5037

CUSTOMER SERVICE

Ph: 1800 755 899

philmac.com.au

Philmac

The connection you can trust.

PHI1660-07/24

Philmac

The connection you can trust.

Ball Valves

YOU CAN'T BEAT THE ORIGINAL

Water is precious. Put your trust in
the original blue handled ball valve.



The Ball Valve you can trust for years of reliable service.

The Philmac blue-handled ball valve
has been servicing the Australian
market for over 40 years.

With a distinctive blue easy grip handle, the
valve is recognised in the market as the industry
standard, providing users with the confidence of
a strong, reliable and robust product.

Proudly made in Australia, the Philmac blue-
handled ball valve is based on a simple on/off
action and is quick and easy to install, allowing
the user full control of water distribution.





Benefits

Easy Action:

The handle is not only easy to operate but has a positive on/off action through 90°. It is ergonomically designed to enable easy gripping.

Robust Construction:

Built to withstand pressures up to 1600 kPa and provide years of reliable operation.

Frost Resistant:

Proven performance in frost conditions.

Install in any Direction:

Philmac ball valves can work in any direction and at any angle.

Visual Indicator:

When in the closed position the blue handle is at 90° to the body and when in the open position it is in line with the body clearly indicating if the valve is open or closed.



Quality Materials:


High quality injection moulded plastic bodies and components plus NBR O-rings and stainless steel screws means years of reliable operation.

Approvals:

All blue handled ball valves carry StandardsMark and WaterMark approval.



Features

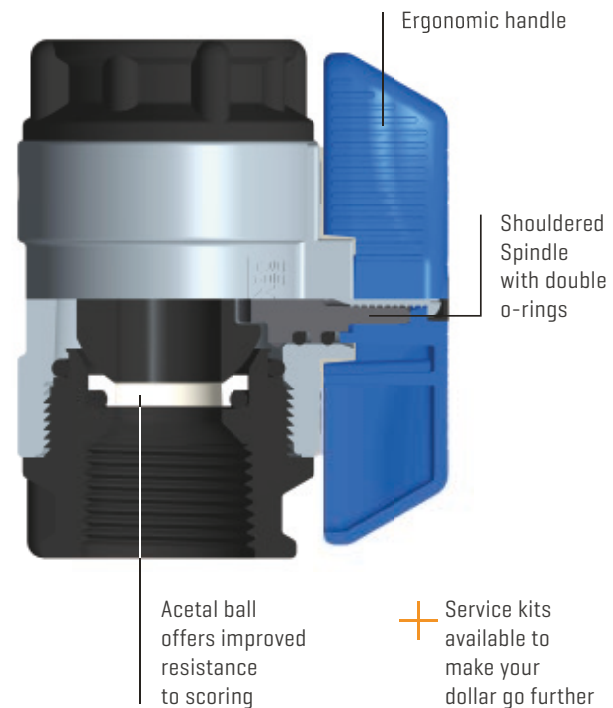

+ Service kits available to make your dollar go further



Available in sizes ½" to 2"

EASY INSTALLATION

1



Apply PTFE tape or approved sealant to the male thread. Sufficient tape needs to be applied to ensure a watertight seal.

2



Screw on to a male or female thread by hand until firm.

3



Using a pipe wrench or multigrips on the end caps only, further screw the ball valve until tight. Where necessary, ensure the thread is held stationary. Do not use pipe wrench or multigrips on the body of the valve.

