


DAVEY

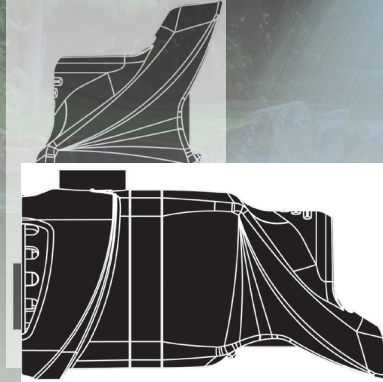

Vertical or horizontal installation

DAVEY Dynapond

Model Numbers:
7000, 8000, 15000

GUARANTEE
1 YEAR

APPLICATIONS

Ideal for fountains, pond recirculation, waterfalls and other water features, koi and fish ponds and freshwater aquaculture.

Dynapond 8000 sea water model now standard.

Tested in compliance with
AS/NZS 4020 
for use in contact with safe drinking water

SUBMERSIBLE POND PUMP WITH ADJUSTABLE INLET STRAINER

FEATURES & BENEFITS

Designed for continuous operation -
24 hours a day, 7 days week.

Open impeller, centrifugal pump
with adjustable strainer.

- Pump can pass small soft solids in the water without blockage

Can be operated horizontally or vertically

- Easy to install
- Easy to conceal

Suction strainer easy to remove for cleaning

- Easy maintenance
- Efficient operation

Made from corrosion resistant materials

- Long service life

No oil in motor or seal

- Safe for fish ponds

Suitable for continuous operation

- No need to shut off water features to allow pump to rest or cool

Partial double case design to discharge water past the motor shell

- Improved motor cooling
- Longer life in continuous operation

Automatic resetting motor overload

- Helps protect the pump in the even of a blockage or jam

Organic green UV resistant thermo plastic casing

- Makes it easier to hide in the pond
- Maintains it's quality appearance longer


OPERATING LIMITS			
Model	7000	8000	15000
Capacities up to	110 lpm	140 lpm	250 lpm
Maximum total head	5.5m	7.0m	9.0m
Maximum submergence	3m		
Maximum water temperature	35°C		
Outlet size	1¼" BSP(F)		
Strainer adjustment	5mm (minimum) 10mm (maximum)		
Suitable fluids Clean pond water of neutral pH* containing up to 1% (<10mm OD) small soft organic solids (some wear should be expected while pumping hard solids in suspension).			
Note: Suitable for fully submerged applications only.			
*Dynapond 8000 suited to clear sea water.			

ELECTRICAL DATA			
Model	7000	8000	15000
Electrical lead length	10m		
Phase	Single		
Supply voltage	220-240		
Supply frequency	50Hz		
Full load current	0.8A	1.3A	3.8A
Input power (P _i)	200w	280w	750w
Insulation class	F		
Speed	2 pole, 2950rpm		
Motor starting	P.S.C.		


INSTALLATION AND PRIMING
For deep ponds use a rope to position and retrieve the pump. Never lower or retrieve the pump using the power lead as this may damage the cable entry seals, causing water leaks and unsafe operation.
Don't use this product for recirculating or filtering swimming pools, spas, etc. While these pumps are built to high safety standards, they are not approved for installations where people will be in the water while they are operating.
Don't pump abrasive materials. Sand and grit in the water being pumped will accelerate wear, causing shortened pump life.
Keep your pump clean, particularly in situations where fibrous materials may get bound around the pump shaft. Regular inspection and cleaning will extend pump life.
Don't run your pump dry. Dynapond models must be switched off manually or by way of an external float/level switch when the water level is reduced to the top of the pump housing.

MATERIALS OF CONSTRUCTION	
PART	MATERIAL
Impeller	Glass filled noryl
Suction strainer	Glass filled polypropylene
Outer casing	Glass filled polypropylene
Pump casing	Glass filled polypropylene
Shaft seal	V rubber & ceramic
Shaft seal elastomer	Nitrile rubber
Pump shaft	416 stainless steel*
Orings	Nitrile rubber
Motor shell	304 stainless steel*
Fasteners	A2 (304) stainless steel*
Power supply leads	HO7RN-F oil resistant

*Note: Dynapond 8000 has 316 stainless steel components for use in sea water.

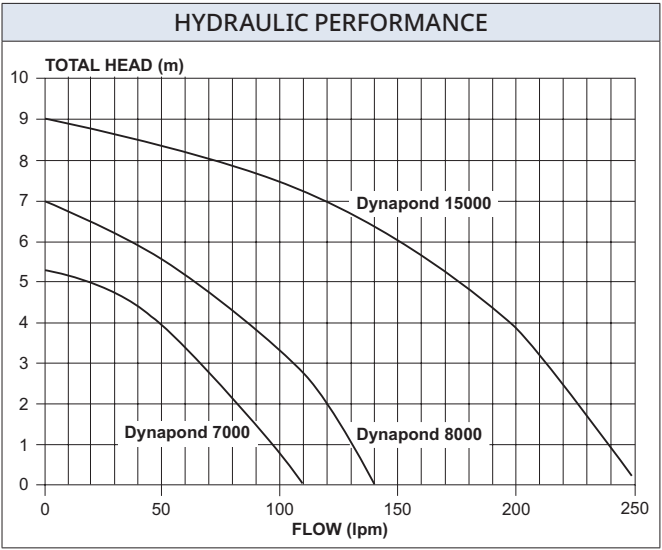

DIMENSIONS (MM)		
Model	Height (mm)	Net Weight (kg)
Dynapond 7000	292	4.3
Dynapond 8000	292	4.3
Dynapond 15000	292	6.2

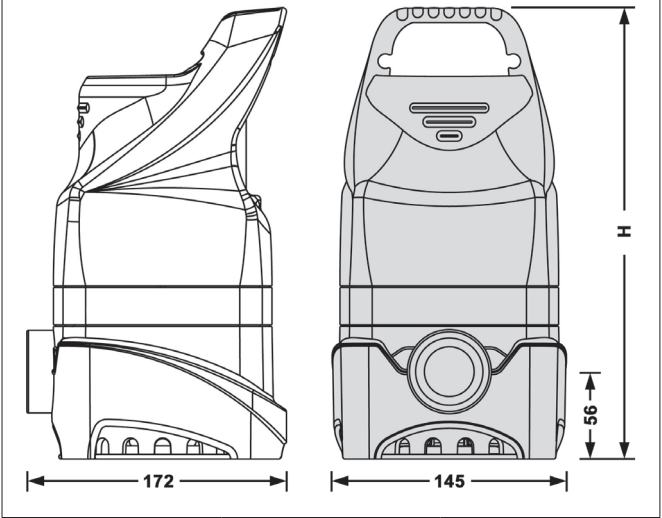

daveywater.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2024.

